
Adaptive Vehicle Make (AVM)

Mr. Paul Eremenko, Program Manager
LTC Nathan Wiedenman, Deputy Program Manager
Tactical Technology Office






DARPA Historical schedule trends with complexity

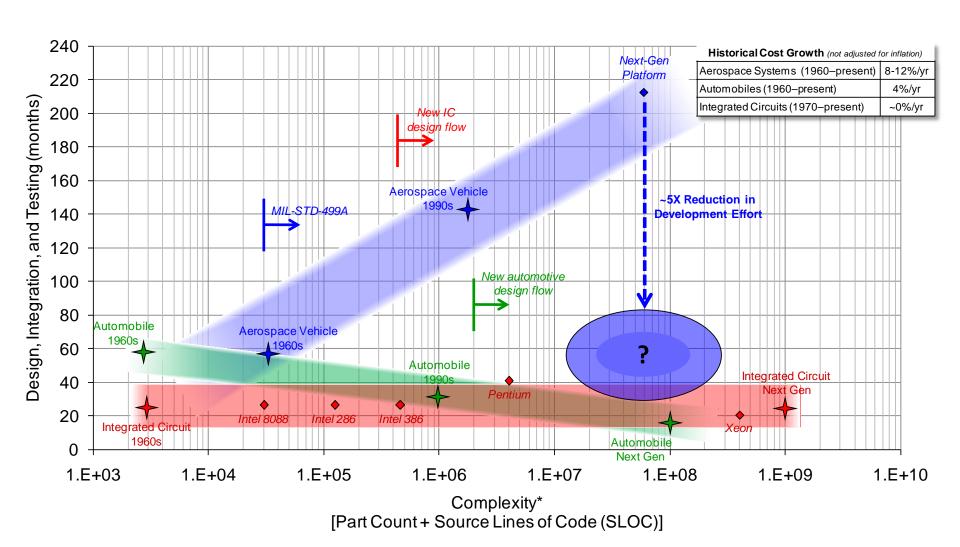




Status quo approach to managing complexity

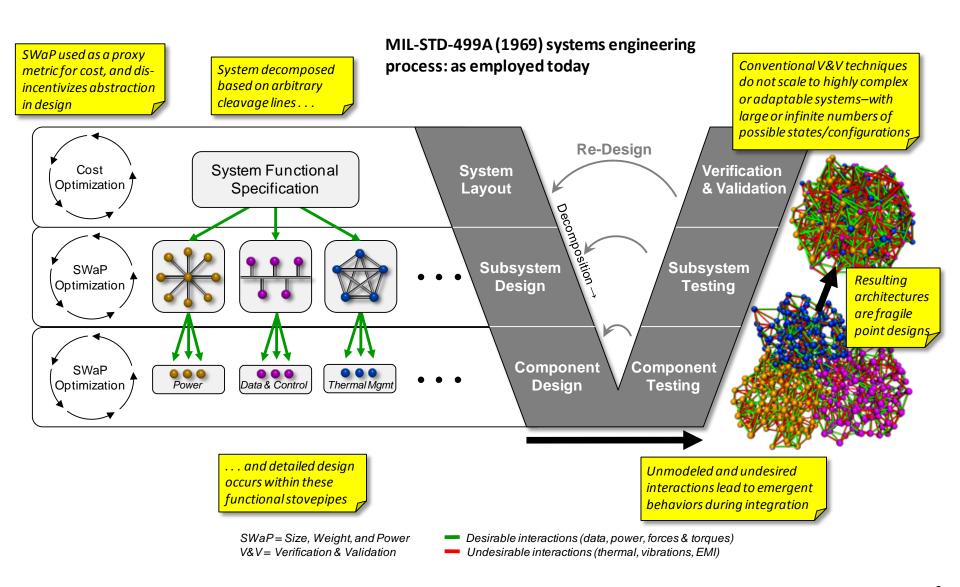




DARPA The technical problem is in the seams


Between stages of production →

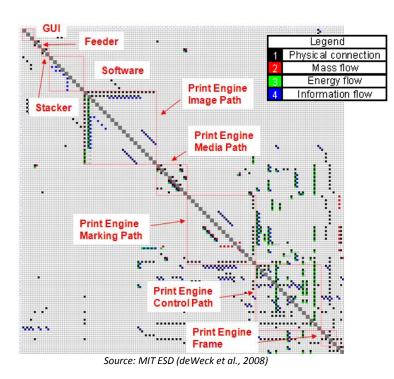

Between people & organizations →



← Between system components

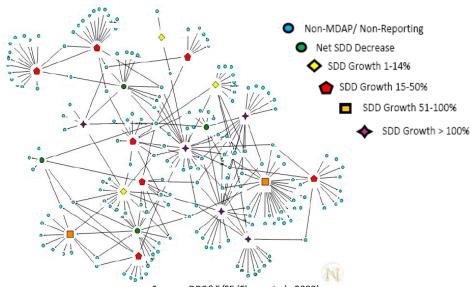

Source: DDR&E/SE (Flowe et al., 2009)



DARPA Adaptive Vehicle Make vision

Shorten development times for complex defense systems [META]

- Raise level of abstraction in design of cyber-electromechanical systems
- Enable correct-by-construction designs through model-based verification
- Compose designs from component model library that characterizes the "seams"
- Rapid requirements trade-offs; optimize for complexity & adaptability, not SWaP


Shift product value chain toward high-value design activities [iFAB]

- Bitstream-configurable foundry-like manufacturing capability for defense systems
- Rapid switch-over between designs with minimal learning curve
- "Mass customization" across product variants and families

Democratize design [FANG]


- Crowd-sourcing infrastructure to enable open-source development of cyberelectromechanical systems [vehicleforge.mil]
- Prize-based Adaptive Make Challenges culminating in an Infantry Fighting Vehicle for testing alongside a program of record [FANG]
- Motivate a new generation of designers and manufacturing innovators [MENTOR]



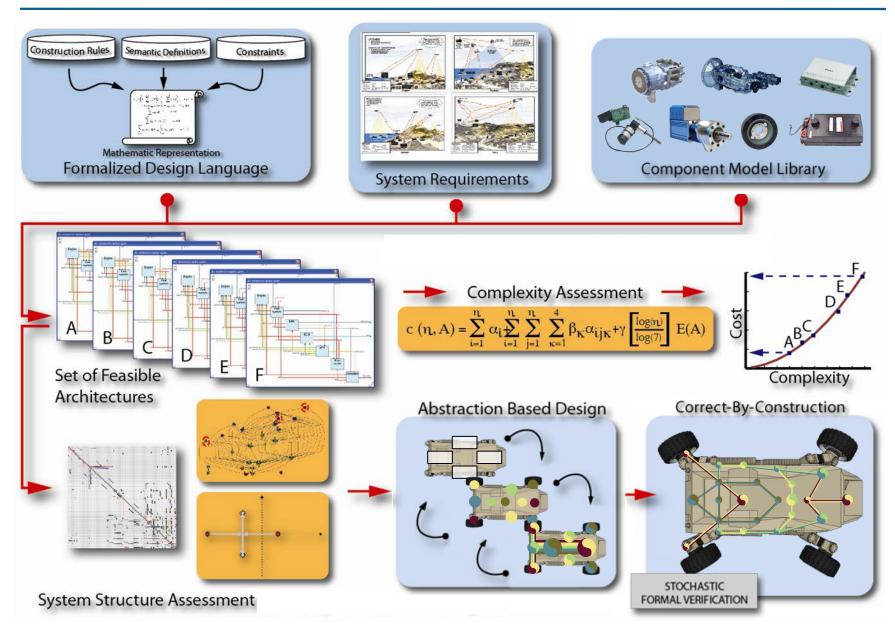




Notional iFAB foundry configuration

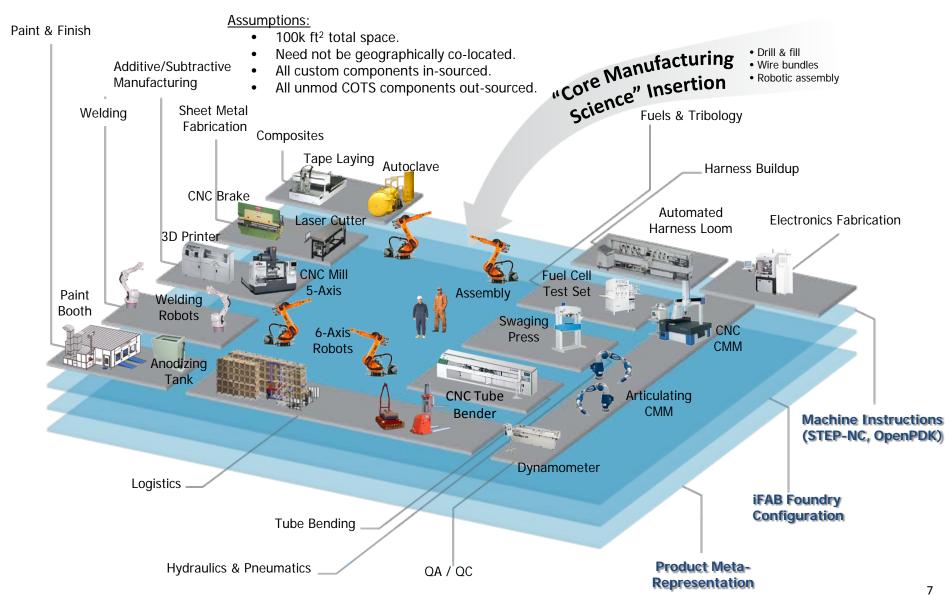



DARPA Crowd-sourcing infrastructure: vehicleforge.mil

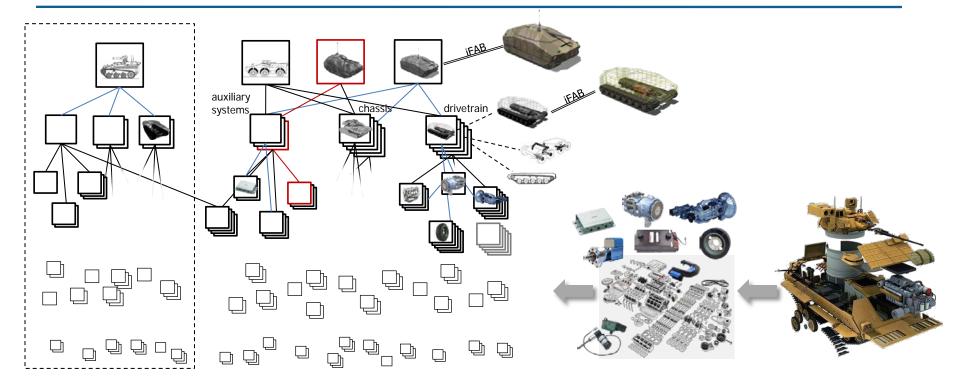

Estimated Size of Component Model Library

Assembly	Unique Parts (upper limit)	Total Parts (lower limit)	Library Parts (unique x 5)
Drivetrain	3,000	8,000	15,000
Chassis/Armor	5,000	12,000	25,000
Other	Other 7,500		37,500
Total	15,500	30,000	72,500

Note: Estimates are at the numbered part level. Cables and circuit boards counted as single part. Excludes variable mission equipment, software.

Elements of a Component Model

Physical attributes	Undesirable emissions • thermal • electro-magnetic • vibrational	
Interfaces • data • power • mechanical	Performance	



Fast, Adaptable Next-generation Ground vehicle (FANG)

Mobility/Drivetrain Challenge

SCOPE

- Vehicle drivetrain to meet IFV speed, efficiency, terrain, reliability objective
- Available model library to include:
 - Hybrid-electric systems
 - Novel ground interfaces

PARTICIPANT POOL

Global

INCENTIVE

- Prize \$1M for winning design
- Winner(s) judged based on multi-objective weighting function

DESIGN AGGREGATION

- Use of META metalanguage required
- Use of vehicleforge.mil optional

BUILD APPROACH

• iFAB foundry build for top design(s)



Chassis/Integrated Survivability Challenge

SCOPE

- Chassis and armor design to meet principal IFVlike survivability objectives
- Available model library to include:
 - Advanced armor concepts
 - Novel configs (monocoque, v-hulls)

PARTICIPANT POOL

Global

INCENTIVE

- Prize \$1M for winning design
- Winner(s) judged based on multi-objective weighting function

DESIGN AGGREGATION

- Use of META metalanguage required
- Use of vehicleforge.mil optional

BUILD APPROACH

• iFAB foundry build for top design(s)



Total Platform Challenge

SCOPE

 Complete IFV based on core Army objectives and distilled requirements

PARTICIPANT POOL

Global

INCENTIVE

- Prize \$2M
- Winner judged based on satisfaction of constraints and multi-attribute preference function (i.e., entirely objective approach)

DESIGN AGGREGATION

- Use of META metalanguage required
- Use of vehicleforge.mil optional

BUILD APPROACH

• iFAB foundry build for top design(s)





Manufacturing Experimentation and Outreach (MENTOR)

Goal

- Educate, motivate, and inspire a nextgeneration cadre of designers and manufacturing innovators
- Inculcate AVM-type design methods such that they become pervasive in subsequent generations of engineers

Approach

- Design collaboration using modern CAD tools and conventional social networking media
- Distributed manufacturing across networks of schools equipped with various digital manufacturing equipment
- Run competitive prize challenges for design and build of moderately complex systems (e.g. go-carts, mobile robots, small UAVs, etc.)
- Outreach Objectives:
 - 10 schools in CY12
 - 100 schools in CY13
 - 1,000 schools in CY14
- Participation by domestic and foreign schools





Experimental Crowd-derived Combat support Vehicle (XC2V)

Goal

- Experiment in crowd-sourced design
- Militarily-relevant application
- Existing (simple) commercial infrastructure

Approach

- Utilize existing social network of ~20,000 from Local Motors (increased by ~3,000)
- Crowd-source design of a combat support vehicle
- \$10k in prizes
- Build in existing micro-factory

Results

- 159 final designs submitted
- 100 of "high caliber" according to DARPA Service Chiefs Fellows
- 4 week design period
- 14 week build period








APPROVED FOR PUBLIC RELEASE, DISTRIBUTION UNLIMITED.



DARPA AVM Portfolio Schedule

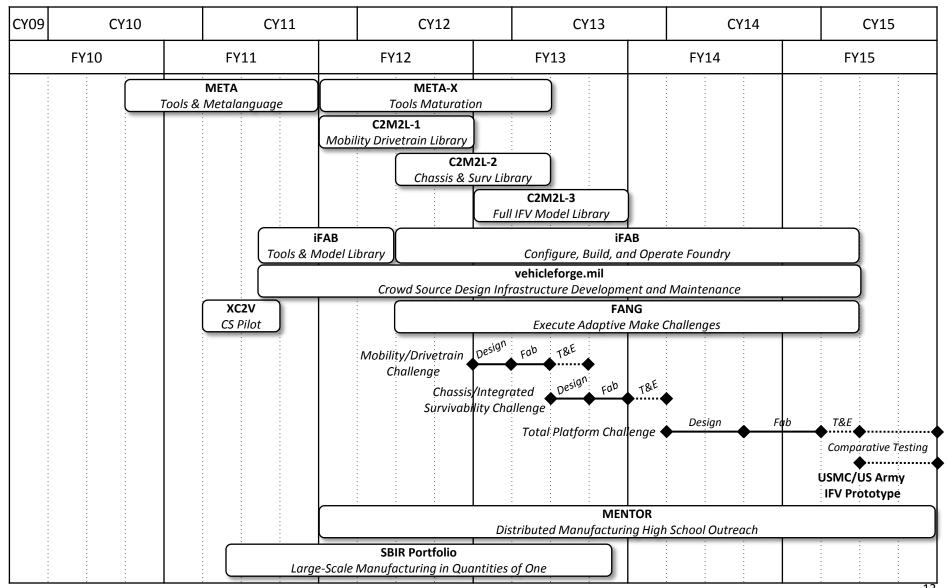



DARPA Adaptive Vehicle Make performer community

META iFAB

Adventium Enterprises	Formal metalanguage capable of integrating models across multiple abstraction levels and perspectives		
BAE Systems	Multi-abstraction-level design framework with simulation traces for certification		
Boeing	Metrics suite to support multiple disciplines using rich corporate historical data		
Dassault Systèmes	Extension of commercial CATIA/DELMIA PLM suite to enable formal verification		
IBM Haifa Research Lab	Formal contract-based language to enable true multi- domain, platform-based design		
MIT (Dr. Rhodes)	Epoch-based real-option theory to assess changeability costs in system designs		
MIT (Prof. Wilcox)	Entropy-based sensitivity and variance-based allocation theories for early complexity assessment		
Rockwell Collins	Pre-verified, reusable design patterns for hardware/software co-design		
Smart Info Flow Tech (SIFT)	Unified probabilistic and non-probabilistic verification with counter-examples to guide design		
SRI International	Verifying and guiding design across abstraction levels and domains using compositional framework		
United Tech Research Ctr	Platform-based generation of design space of feasible architectures with metric-based selection		
Vanderbilt Univ (Dr. Bapty)	Compositional cross-domain tool-chain analysis templates that support deep domain analysis		
Vanderbilt Univ (Dr. Neema)	Rich model-based approaches developed for software and VLSI into the CPS world		
Xerox PARC	Function-based framework for co-verification assessment and reasoning at early stages of design		

Boeing/General Motors	Manufacturing capability and process model library with describing foundry resources & human actors	
Carnegie Mellon Univ	Distributed agents/process model approach for two-way interface between CAD and CAM systems	
Intentional Software Formal "meta meta" language to enable mult co-design of artifact & manufacturing		
Penn State ARL	Agent-based foundry configuration and trade space visualization	
Univ of Delaware	Developing compositional cross-domain tool-chain analysis templates for composites manufacturing	
Xerox PARC	Rapid construction and search of feasible manufacturability spaces and metrics for such spaces	
Georgia Tech GTRC	Creating adaptable software libraries of manufacturing processes pertinent to the fabrication of electromechanical components and/or assemblies	





DARPA Example elements of a component model

	Component	Subassembly	Assembly	Structure
Physical attributes • size and shape • mass properties	0.5mm 1.4mm 1.4mm 1.4mm 1.5mm 1.5mm 1.5mm 1.5mm 1.5mm 1.5mm 1.5mm 1.5mm	GPS Bose of GP2304 CPTSIDE CTTSIDE CTT	1 2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
Interfaces • data • power • mechanical	p.i n.i Land Pattern 8.51mm p.v v 1.v 2.63mm 3.81mm 1.65mm 2.254mm	SO CON TO COM TO	-7 +20 1.55 7 +20	SECT N-N san
Undesirable emissions • thermal • electro- magnetic • vibrational	MOT SPOT WOTH (cm)	20 20 0 200 400 600 800 1000 Frequency (MHz)	and see the second of the seco	4000 000 000 1000 1000 1000 1000 1000 1
Performance characteristics • blackbox model	3000 2500 2500 2000 1000 500 0 10 20 30 40 Current (A)	(95) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	1 1 1 3 5 Voltage (Vdc)	30000 (8) 20000 0 0.03 0.06 0.09 0.12 0.15 Strain (in/in)

APPROVED FOR PUBLIC RELEASE. DISTRIBUTION UNLIMITED.